



DIAGRAMMA DI LAVORO – 360°
WORKING DIAGRAM – 360°
DIAGRAMME DE TRAVAIL – 360°
ARBEITSBEREICH – 360°
DIAGRAMA DE ALCANCES – 360°

ALTURAS DE LEVANTAMIENTO
 HUBHOHEN
 HAUTEURS DE LEVAGE
 LIFTING HEIGHTS
 ALTEZZA DI SOLLEVAMENTO

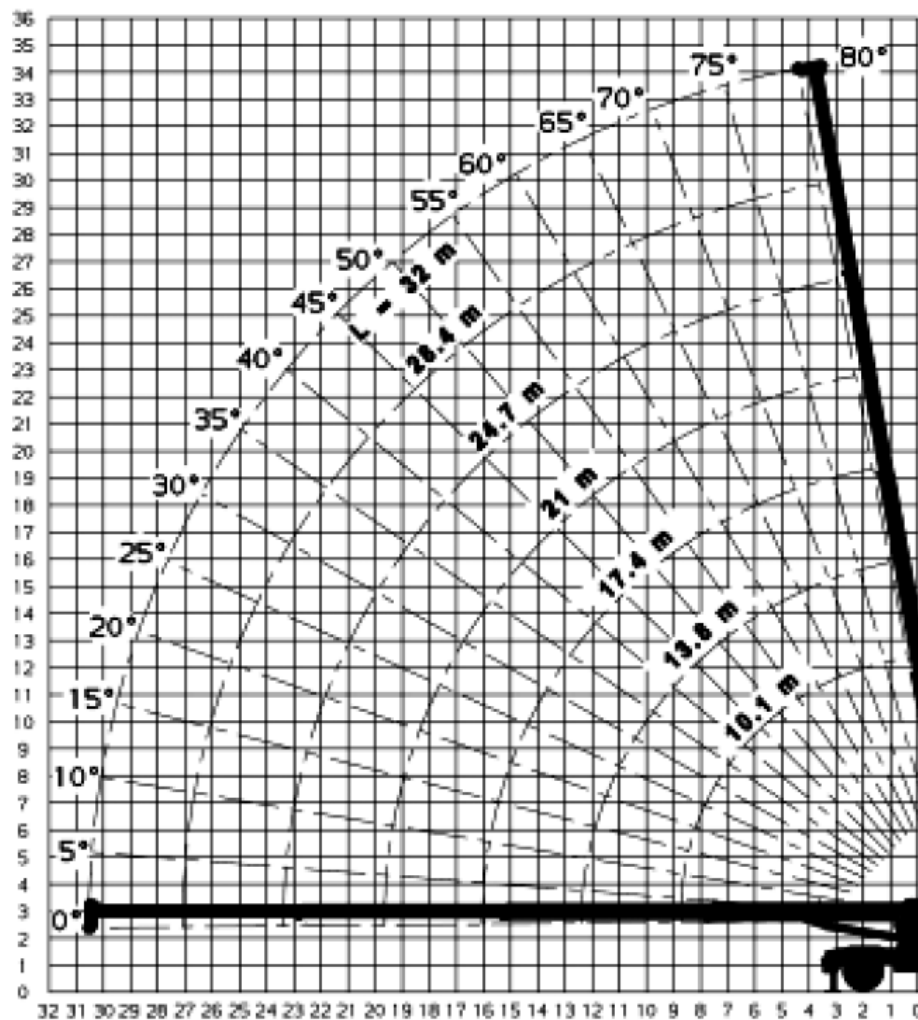

ASSE DI ROTAZIONE
 ROTATION AXLE
 AXE D'ORIENTATION
 DREHACHSE
 EJE DE GIRO

RAGGIO DAL CENTRO DI ROTAZIONE
 RADIUS FROM CENTER OF ROTATION
 PORTEE DE L'AXE D'ORIENTATION
 RADIUS AB DREHACHSE
 RADIO DESDE EL CENTRE DE GIRO



GRIL 8500T



5,80 m x 6,17 m	10,1 m – 32 m	4400 kg	360°	





	PORTATE SU STABILIZZATORI IN kg. – 360°						
	LUNGHEZZA BRACCIO PRINCIPALE						
	10,1 m	13,8 m	17,4 m	21 m	24,7 m	28,4 m	32 m
2,5 m	45000						
3 m	40400						
3,5 m	31600	18000					
4 m	31300	18200	17000	16100			
4,5 m	27200	18500	16600	14500			
5 m	24000	19000	15700	13700	11600	8300	
6 m	19400	19300	15200	13100	10600	7800	6300
7 m	14500	14500	13600	12000	9400	7000	5900
8 m	12000	11700	11400	10600	8500	6700	5600
9 m		9400	9200	9000	7600	6300	5400
10 m		7800	7800	7500	6600	5800	4900
11 m		6600	6600	6500	6000	5200	4400
12 m		5400	5500	5500	5300	4700	3900
13 m			4900	4900	4800	4200	3500
14 m			4200	4200	4200	3800	3200
15 m			3600	3600	3500	3500	3100
16 m				3100	3100	3000	2900
17 m				2700	2700	2700	2600
18 m				2500	2400	2400	2400
19 m				2100	2100	2100	2100
20 m					1800	1900	2000
21 m					1600	1700	1700
22 m					1400	1500	1500
23 m						1400	1400
24 m						1200	1200
25 m						1100	1100
26 m						900	900
27 m							800
28 m							700
29 m							600
30 m							500

ATTENZIONE
È VIETATO SOLLEVARE IL BRACCIO TELESCOPICO OLTRE I 65°
SE LA GRU NON È POSIZIONATA SUGLI STABILIZZATORI



GRIL 8500T







				
10 bar. 16.00 R25	10,1 m – 17,4 m	4400 kg	360°	


	PORTATE SU PNEUMATICI IN kg – 360°		
	LUNGHEZZA BRACCIO		
	10,1 m	13,8 m	17,4 m
3,5 m	10100	2200	1500
4 m	8200	2200	1500
4,5 m	7000	2200	1500
5 m	5900	2200	1500
6 m	4300	2200	1500
7 m	3200	2200	1500
8 m	2400	2200	1500
9 m		1700	1500
10 m		1200	1100
11 m		900	800



GRIL 8500T



				
10 bar. 16.00 R25	10,1 m – 17,4 m	4400 kg	2 km/h	

	PORTATE SU PNEUMATICI IN kg		
	LUNGHEZZA BRACCIO		
	10,1 m	13,8 m	17,4 m
2,5 m	18800	7000	
3 m	18800	7000	
3,5 m	16700	7000	
4 m	15100	7000	2400
4,5 m	13700	7000	2400
5 m	12500	7000	2400
6 m	10400	7000	2400
7 m	7900	7000	2400
8 m	6200	5900	2400
9 m		4700	2400
10 m		3800	2400
11 m		3000	2400
12 m		2500	2400
13 m			2000
14 m			1600
15 m			1200